



Fig. 1

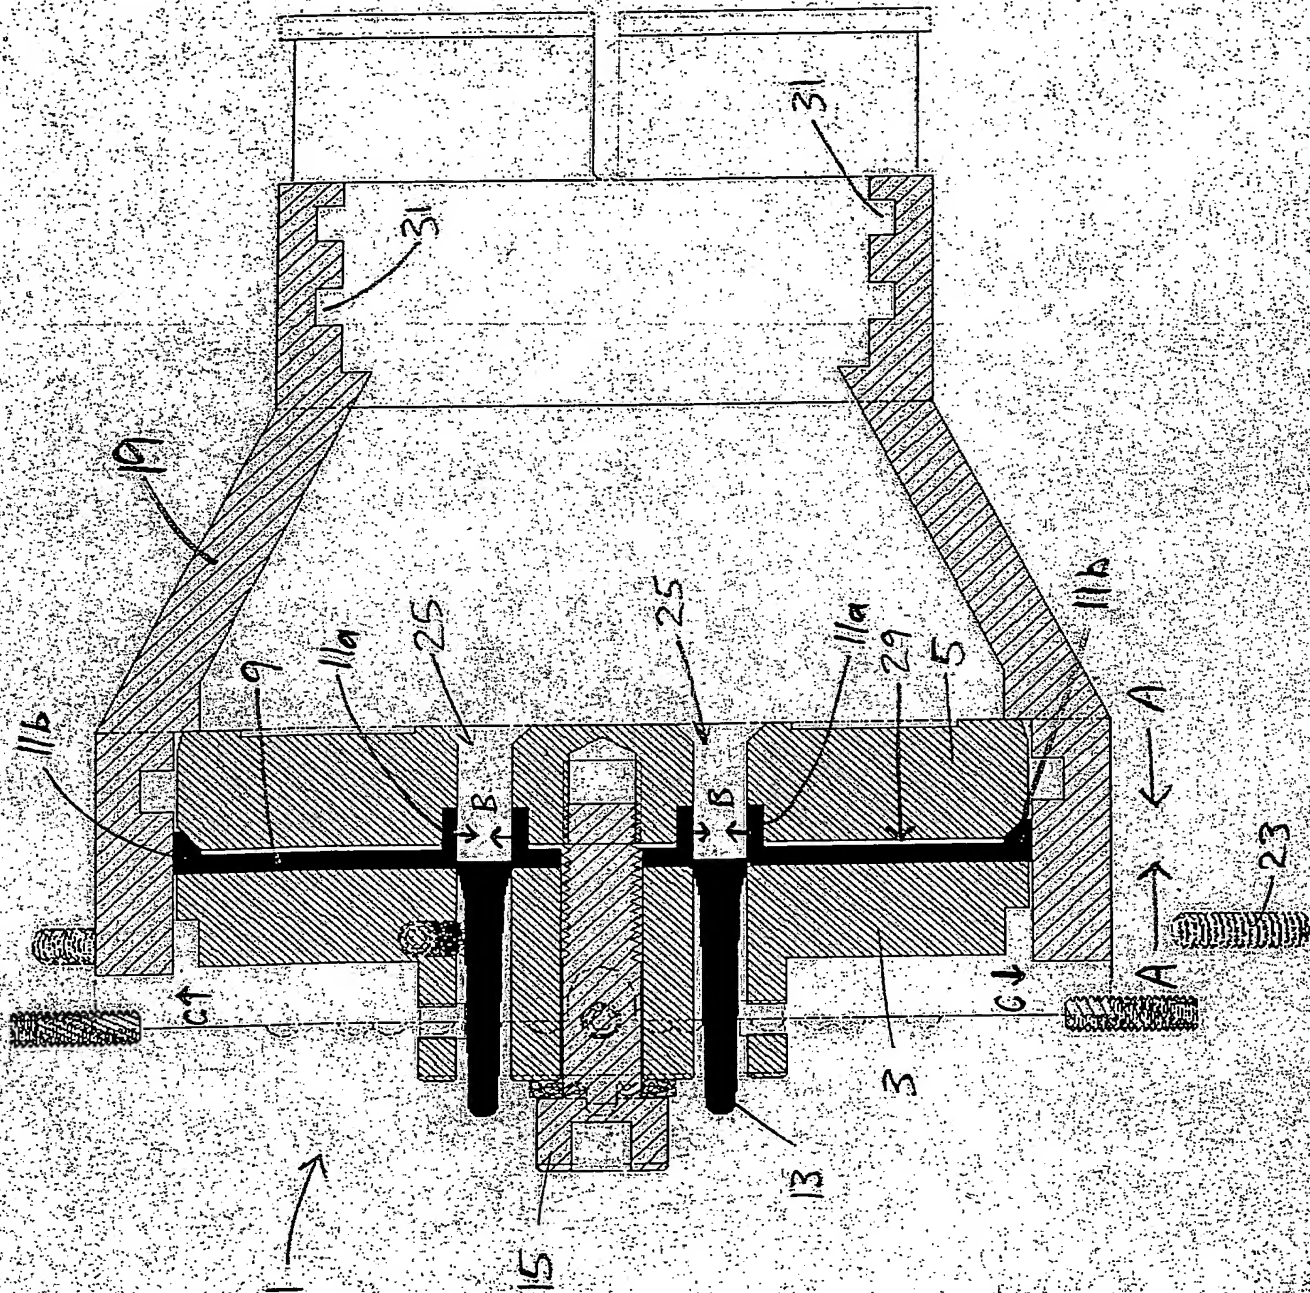


BEST AVAILABLE COPY

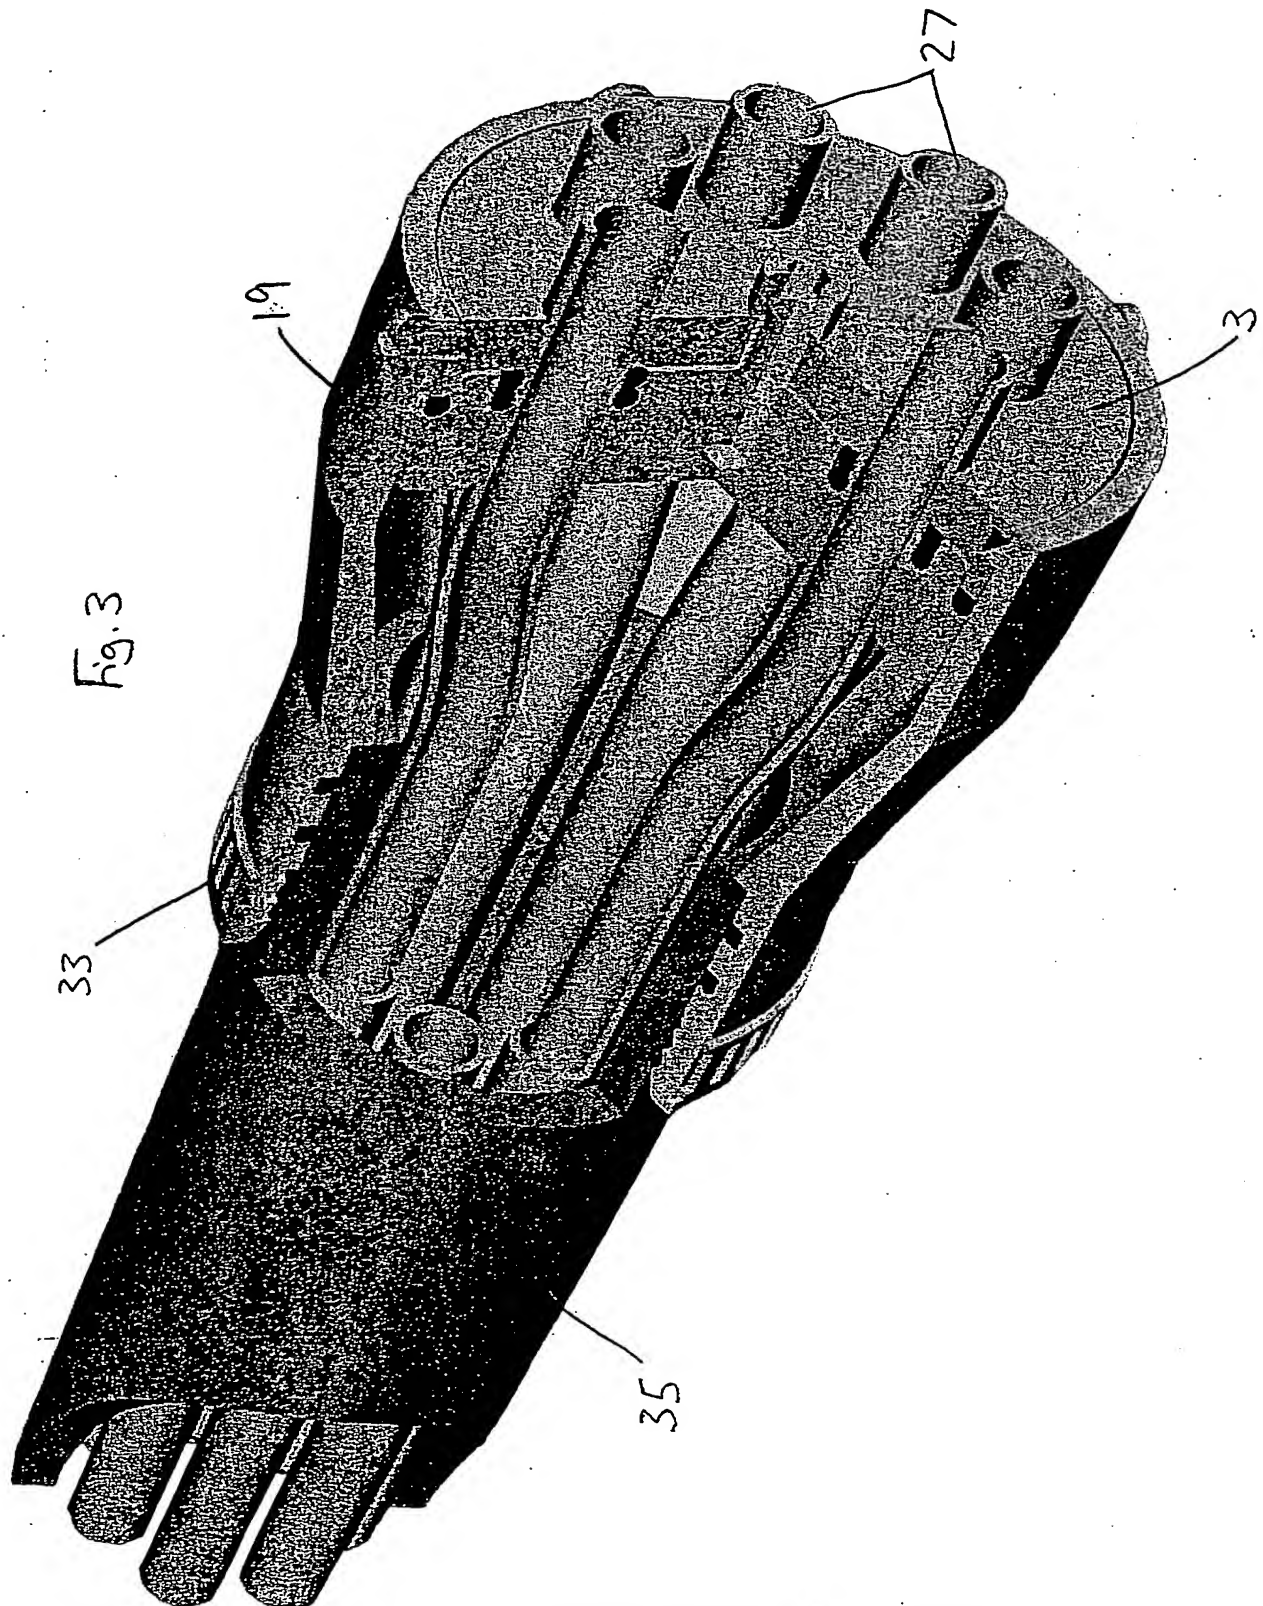


BEST AVAILABLE COPY

4/6

Fig. 4

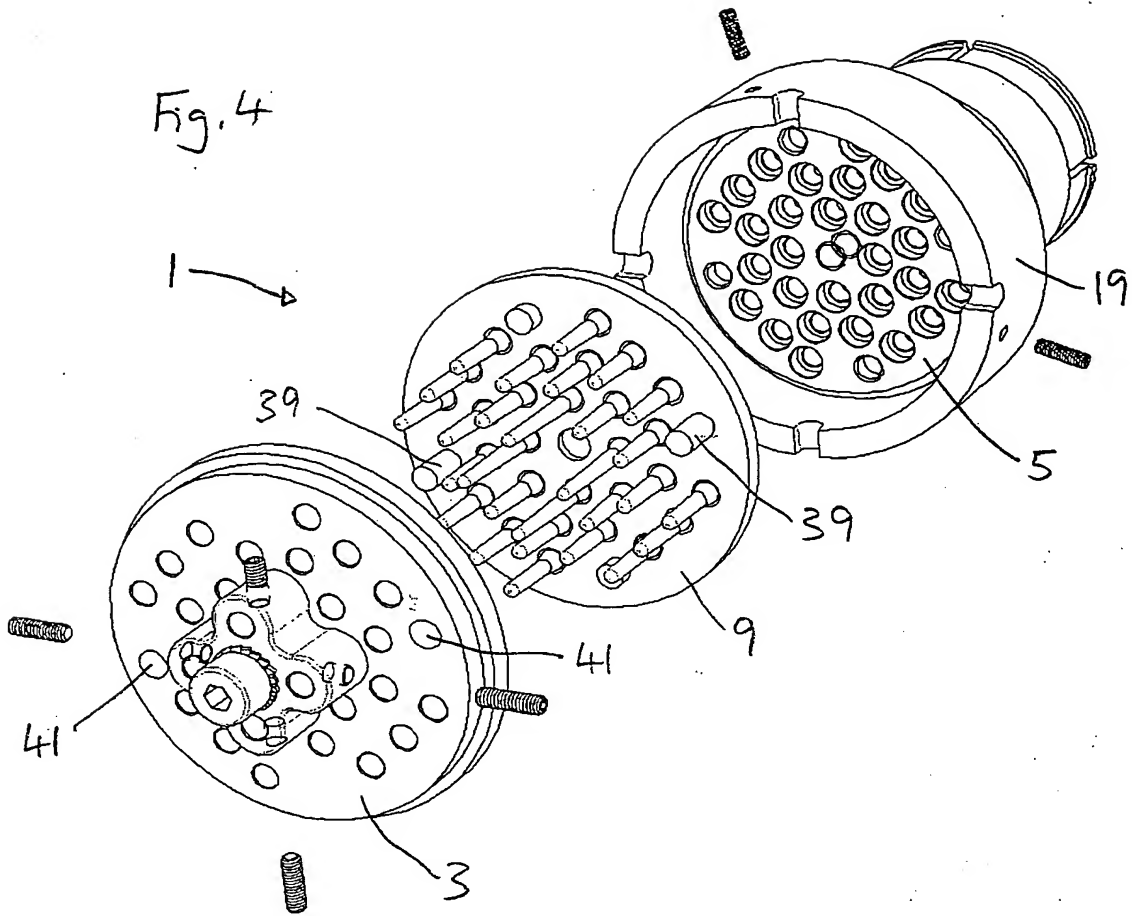

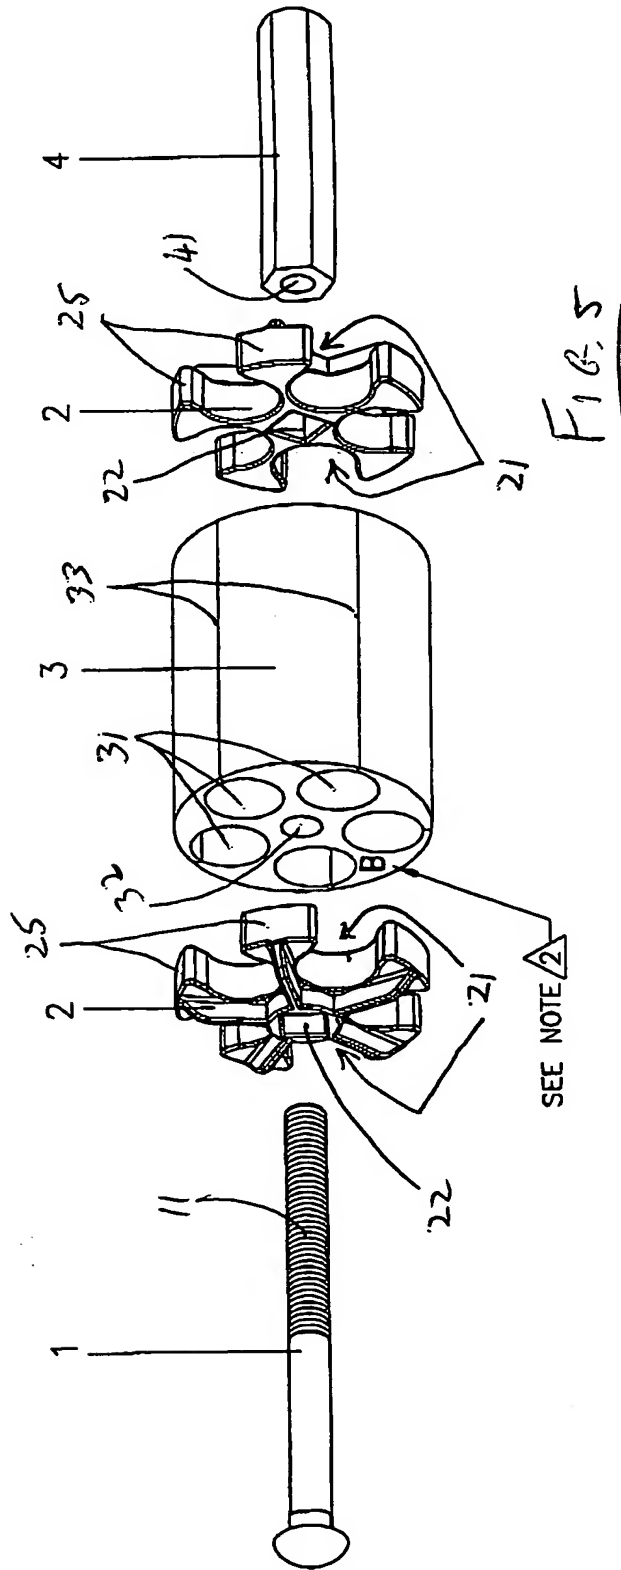


O.D. $\phi 32,0\text{mm}$ ($\phi 1,26''$)
 I.D. $\phi 10\text{mm}-\text{X}5$ ($\phi 0,39''$)

NOTES:

1. ASSEMBLY TO BE PRINTED WITH PRODUCT ID AND COUNTRY OF ORIGIN.
2. GASKET TO BE INSTALLED WITH THE LETTER "B" ON THE BOTTOM (BOLT END) OF THE ASSEMBLY.

6/6

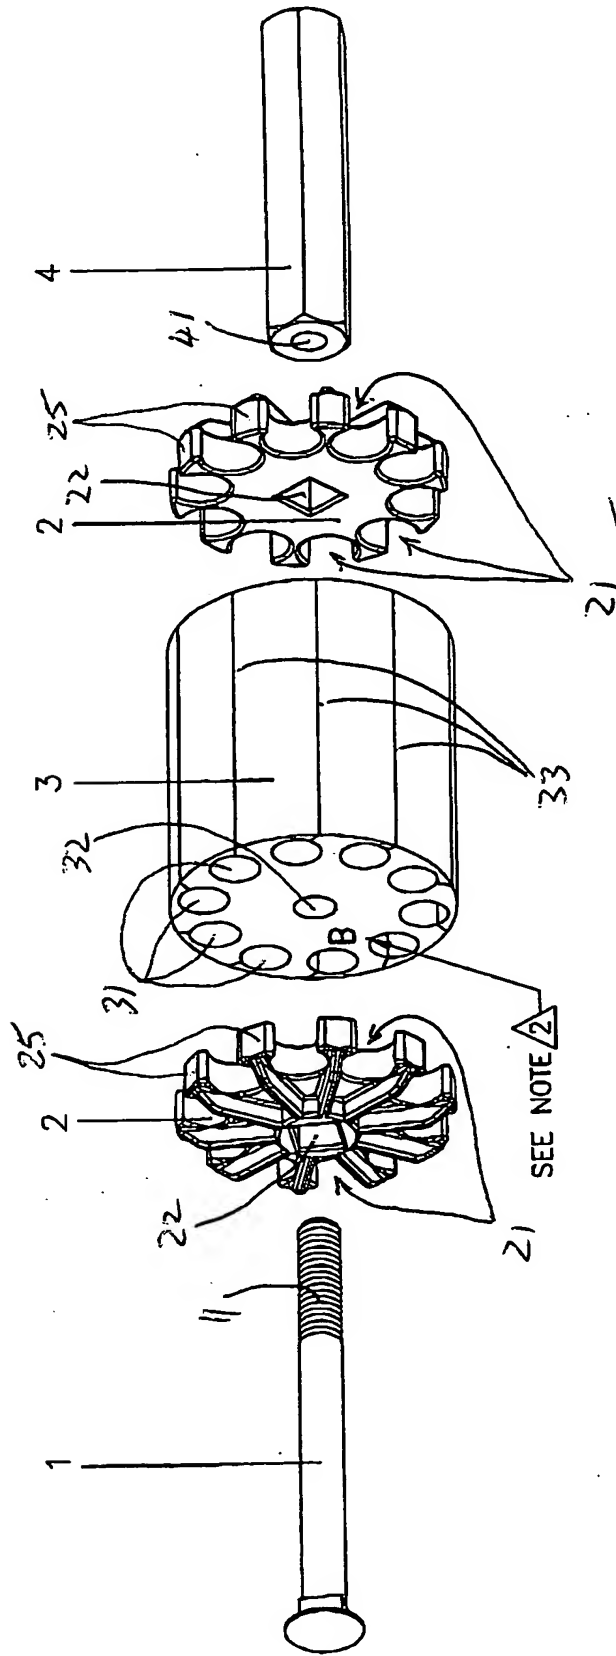

O.D. $\phi 39,0\text{mm}$ ($\phi 1,54''$)
 I.D. $\phi 7\text{mm}-\text{X}10$ ($\phi 0,28''$)

NOTES:

1. ASSEMBLY TO BE PRINTED WITH PRODUCT ID AND COUNTRY OF ORIGIN.

2. GASKET TO BE INSTALLED WITH THE LETTER "B" ON THE BOTTOM (BOLT END) OF THE ASSEMBLY.